
Acknowledged globally

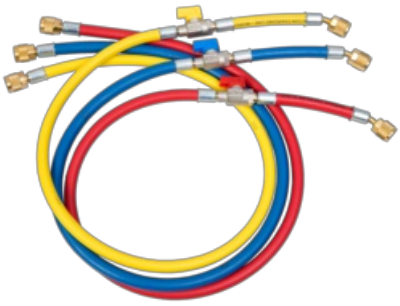

CCL-36-CA

Item Number 4668559

Premium charging hose with ball valve. The special rubber compound is extremely durable due to its high pressure resistance and low embrittlement. Equipped with full flow ball valve to help eliminating the chance of refrigerant burns or atmospheric releases.

- Replaceable long life neoprene seal
- 870 psi working pressure
- High quality rubber compound for high elasticity, against hardening and embrittlement

Technical Data

Material	Brass | Rubber
Color	blue | red | yellow
Number of Hoses	3
Length	36 "
Sealing	Neoprene
System Connection	1/4" SAE | 45°bend | With core depressor
Device connection	1/4" SAE
Valve Core Depressor	Yes
Ball Valve	Yes
Working Pressure	870 psi
Burst Pressure	3,600 psi
Diameter	1/4"
Packaging	Blister

Accessories

REFCO Manufacturing (US) Inc.
66 B Industry Avenue
Springfield MA 01104

Phone 413 739 4761
sales@refcoswiss.com

Certificate
ISO 9001 / ISO 14001

4661147	CA-5/16"SAE-Y	Ball valve, yellow, 5/16"SAE X 5/16"SAE
4661121	CA-5/16"SAE-B	Ball valve, blue, 5/16"SAE X 5/16"SAE
4661139	CA-5/16"SAE-R	Ball valve, red, 5/16"SAE X 5/16"SAE
4682446	CA-5/16"SAE-Y-45°	Ball valve for charging hose, yellow with threaded hull 45° bent
4682420	CA-5/16"SAE-B-45°	Ball valve, blue with threaded hull 45° bent
4682438	CA-5/16"SAE-R-45°	Ball valve for charging hose, red with threaded hull 45° bent

Spare Parts

9880871	P-509-T/10	PTFE gasket 1/4" SAE, 10 pieces
9883979	P-509-T/100	PTFE gaskets, 100 pieces
9880869	P-513/10	Core depressor 1/4", 10 pieces
9883961	P-513/100	Core depressor 1/4", 100 pieces

REFCO Manufacturing (US) Inc.
66 B Industry Avenue
Springfield MA 01104

Phone 413 739 4761
sales@refcoswiss.com

Certificate
ISO 9001 / ISO 14001